

SikaTard® 930

Cement Hydration Stabiliser

Product Description SikaTard® 930 is an admixture developed for the control of cement hydration. SikaTard®-930 stabilises concrete mixes without setting for extended periods and without negatively influencing their quality.

Uses ■ SikaTard® 930 is mainly used in wet and dry spray shotcrete where cement hydration of concrete mix is prevented until it is required. It is therefore possible to stabilise mixed concrete for hours or even days i.e. in tunnelling work.

Characteristics / Advantages

- SikaTard® 930 blocks cement hydration. This is in contrast to other stabilisers or retarders, which only retard hydration of the cement.
- The effect of SikaTard®-930 may be immediately stopped when Sigunit® is used as an accelerator. Thus hydration of the previously stabilised shotcrete, will start immediately.
- SikaTard®-930 does not contain chlorides or any other steel corrosion promoting materials. It can therefore be used in steel reinforced concrete construction without restriction.

Product Data

Form

Appearance / Colour Colourless.

Packaging 220 kg drums.
Bulk IBC

Tanker delivery on request.

Storage

Storage Conditions / Shelf Life 24 months from date of production if stored in undamaged and unopened, original sealed containers, protected from direct sunlight at temperatures between +1°C and +35°C.

Technical Data

Chemical Base Aqueous solution of polycarbonic acid salts.

Density Approx. 1.10 – 1.12 kg/ltr




Table of Contents

System Information

Application Details

Dosage

SikaTard[®]-930 is normally used at between 0.2% to 3% by weight of cement and added at the batching plant. The following diagram shows the approximate retarded stabilisation times at various dosages.

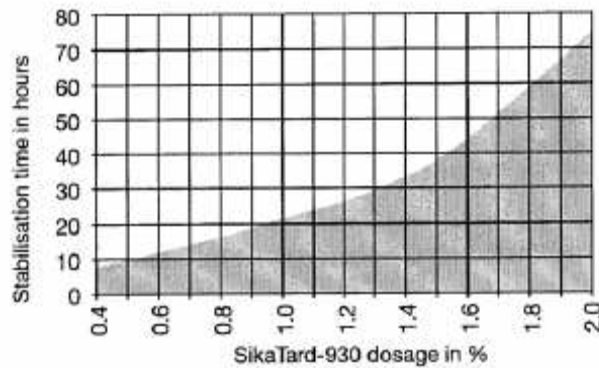

The table is to be used as guideline only - for specific stabilisation periods, trials with the actual cement are essential.

SikaTard[®]-930 is added to the mix at the batching plant. SikaTard[®]-930 may also be combined with the following Sika[®] products for additional performance enhancement of the concrete or its application:

- SikaTard[®]-203
- SikaFume[®] / -TU
- Sikacrete[®]-PP1 TU
- Sigunit[®]-P1 AF / -L50 AF / -L53 AF / -L54 AF / -L72 AF

Application

Instructions

Notes on Application / Limitations

SikaTard[®]-930 is generally suitable for all types of Portland cement. For specific stabilisation periods pre-trials are essential as stated above.

Ask for technical support from your local Sika Company.

Value Base

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

Local Restrictions

Please note that as a result of specific local regulations the performance of this product may vary from country to country. Please consult the local Product Data Sheet for the exact description of the application fields.

Health and Safety Information

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Material Safety Data Sheet containing physical, ecological, toxicological and other safety-related data.

Legal Notes

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the product when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.



PT. Sika Indonesia
 Jl. Raya Cibinong- Bekasi km. 20
 Limusunggal- Cileungsi
 BOGOR 16820 - Indonesia
 Tel. +62 21 8230025
 Fax +62 21 8230026
 Website : www.sika.co.id
 e-mail: sikacare@id.sika.com

Branches
Surabaya :
 Puri Niaga Blok G No. 29, Jl. Raya Rungkut Menanggal 11, Surabaya
 Tel : 031-8690202 ; Fax : 031-8682123
Medan :
 Jl. Pancing / Jl. Willem Iskandar No.75 & 75 A, Kec. Medan Tembung
 Tel : 061- 6619500; Fax : (061) 6619400
Batam :
 Jl. Laksamana Bintang, Komp. Bumi Riau Makmur Blok E No.3, Sungai Panas
 Tel : (0778) 424928; Fax : (0778) 450189

